


Low Backlash Slew-ring

Sample dimensions (other sizes available)

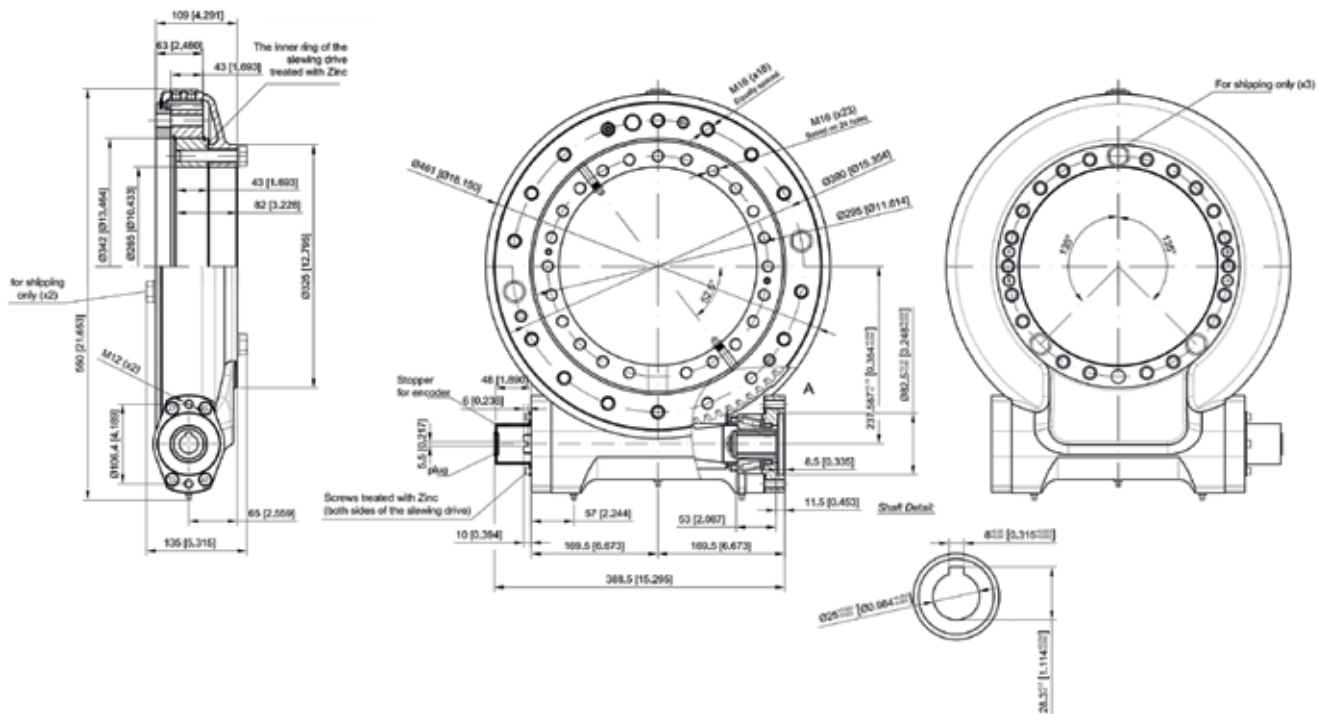

Specifications

Module	5 mm
Number of worms	1
Weight	67 kg
Holes (- Na)	N. 18 (M16)
Holes (- Ni)	N. 24-1 (M16)
Max. Torque	12.308 Nm
Nominal Torque	10.200 Nm
Tilting moment	67.800 Nm
Static Load Rating, Radial	222 KN
Static Load Rating, Axial	555 KN
Dynamic Load Rating, Radial	117 KN
Dynamic Load Rating, Axial	133 KN
Maximum Backlash	0.04°

Ordering info

Link www.sunto.technology/spare-parts/LBS#order
 Email sales@sunto.technology