


All-in Panel Sensor

Dimensions

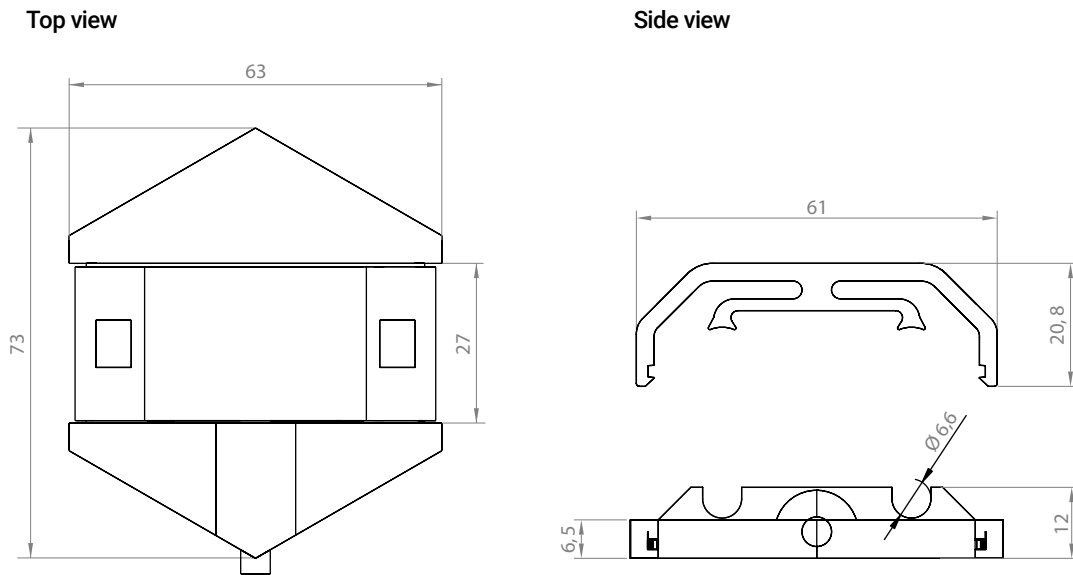

Specifications

| | |
|-----------------------------|----------------------|
| Digital Output | UART, SPI, I2C |
| Response Time | 10 s |
| Current Dynamic Range | -30 ÷ 30 A |
| Current Error | ±0.1 A; ±1% |
| Temperature Dynamic Range | -30°C ÷ 85°C |
| Temperature Error | ±1°C |
| Tilt Dynamic Range | -90° ÷ 90° |
| Tilt Error | ±1° |
| Max Data Rate | 0.1 Hz |
| Operating Temperature Range | -30°C ÷ 85°C |
| International Protection | 67 |
| Power Supply | 5-24 V _{DC} |
| Max Power Consumption | 0.3 W |
| Weight (without cable) | 50 g |
| 5 m Long Cable Weight | 150 g |

Ordering info

Link www.sunto.technology/sensing/APS/#order

Email sales@sunto.technology